

DS-K1T673TDWX Face Recognition Terminal



Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/User
- Face recognition accuracy rate ≥ 99%
- Built-in Mifare card, Felica card, and DESfire card reading module (Presents card on the screen to authenticate)
- Face mask detection
- 100,000 face capacity, 10,000 fingerprint capacity (With fingerprint module), 500,000 card capacity, and 150,000 event capacity
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6)
- Supports single person and multiple people (Up to 5 people) recognition





Specification

System				
Operation system	Linux			
Temperature measurement				
Resolution	600 × 1024			
Display				
Size	7-inch			
Туре	Touch screen			
Video				
Pixel	2 MP			
Lens	Dual-lens			
Video standard	PAL (Default)/NTSC			
Network				
Wired network	Support 10/100/1000 Mbps self-adaptive			
Wi-Fi	Support			
Interface				
USB	1 (For Module)			
Network interface	1			
Audio Output Interface	1 (3.5 mm)			
RS-485	1			
Wiegand	1			
Lock output	1			
Exit button	1			
Door contact input	1			
TAMPER	1			
Capacity				
Card capacity	500,000			
Face capacity	100,000			
Event capacity	150,000			
Fingerprint capacity	10,000 (With fingerprint module)			
Authentication				
Face recognition accuracy rate	≥ 99%			
Card type	Mifare 1 card, DESfire card, Felica card			
Card reading distance	0 to 3 cm			
Card reading duration	<1s			
Face recognition duration	< 0.2 s per person			
Face recognition distance	0.3 to 3 m			
Function				
Two-way audio	Support			
Time synchronization	Support			
Face anti-spoofing	Support			
Live view	Support			
Audio prompt	Support			




General			
Power supply	12 VDC to 24 VDC/2 A		
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)		
Working humidity	0 to 90% (no condensing)		
Dimensions	110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94")		
Protective level	IP65		
English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Japanese, Korean			

Available Model

DS-K1T673TDWX

Dimension

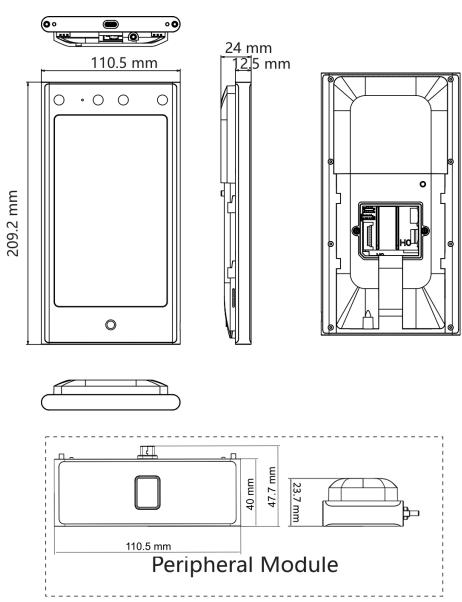

^{*}Notes: External modules are of same dimension. Here takes the fingerprint module as an example.



- Accessory
- Optional

DS-KAB673-BQR	DS-KAB673-FBQR	DS-KAB673-FB	DS-KAB673-B
- en	[* □ ⊙#]		
Supports bluetoooth and QR Code function	Supports fingerprint, bluetoooth and QR Code function	Supports fingerprint and bluetoooth function	Supports bluetoooth function



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400

sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com